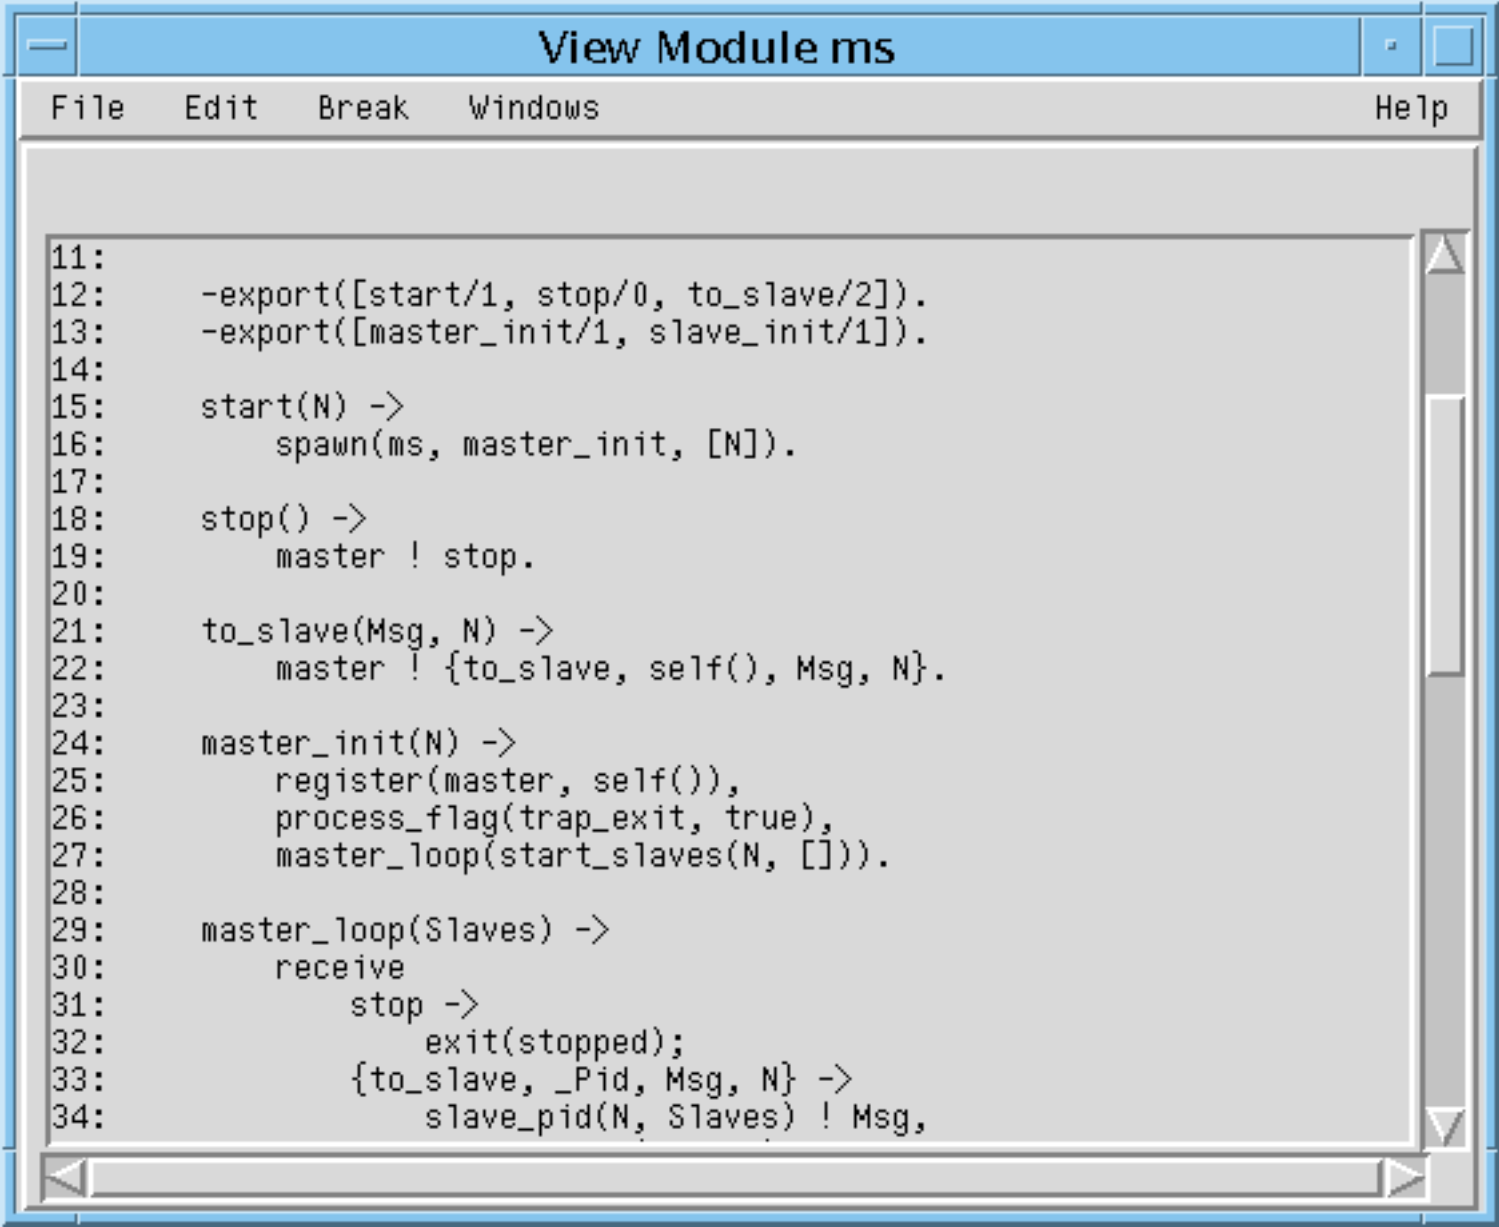
View Module ms
File Edit Break Windows Help
11:
12: -export([start/1, stop/0, to_slave/2]).
13: -export([master_init/1, slave_init/1]).
14:
15: start(N) ->
16: spawn(ms, master_init, [N]).
17:
18: stop() ->
19: master ! stop.
20:
21: to_slave(Msg, N) ->
22: master ! {to_slave, self(), Msg, N}.
23:
24: master_init(N) ->
25: register(master, self()),
26: process_flag(trap_exit, true),
27: master_loop(start_slaves(N, [])).
28:
29: master_loop(Slaves) ->
30: receive
31: stop ->
32: exit(stopped);
33: {to_slave, _Pid, Msg, N} ->
34: slave_pid(N, Slaves) ! Msg,